









Bellsure - the contractor's friend since 1995. With a strong background in the construction industry, Bellsure began its journey as an architectural ironmongery expert.

And you'll find the same today - only our products and services have expanded to meet the needs of our diverse client base - including main contractors, office fit out companies and retail shop front specialists.

We have a very practical, straight-forward and customer-focused approach, working with a range of people on each project - from architects and designers to commercial and site teams.

Bellsure - your trusted architectural supply chain partner.

SUPPORTING YOU FROM CONCEPT TO COMPLETION



INFORM

Access our specialist technical skills and supply chain in a range or architectural hardware fields. We have specialists in doorset scheduling, automatic doors, architectural ironmongery, glass partitioning and shop facades, glass balustrades, street furniture, cycle storage and car parking solutions.



ADVISE

We pride ourselves on having the in-depth knowledge you need. Our customers come back to us time and again because they trust the advice we give. Bellsure are already a trusted adviser and an established supplier to thousands of contractors.



DESIGN

We work closely with our customers to make sure that your design is the best that it can be - fantastic looks, compliance, functionality and space saving are all considerations that we discuss with you during the planning and design process. For architects and contractors, we supply free CAD drawings as part of our friendly, efficient service.



NSTALL

Working with our approved subcontractors, we can support you with the installation, commissioning and maintenance for any of our products.



CONTACT US 01730 719 292 | www.bellsure.co.uk | info@bellsure.co.uk



YOUR SPECIALIST ARCHITECTURAL





OUR DIVISIONS



Cycle parking solutions, shelters and enclosures, street furniture, car parking products and mailboxes. We work with a range of clients and partners to design, supply and install bespoke street scene solutions.



We supply a wide range of architectural ironmongery, complete doorsets, automatic doors, access control and washroom fittings to the construction sector.



Stylish glass fittings for shop fronts, office fit-out projects, showers and wetrooms. Cost-effective, safe and structural balustrades for residential and commercial projects.

OUR ACCREDITATIONS

Pre-qualified, quality assured, health & safety accredited for your peace of mind.



























Think Glass. Think Vista. A perfect fit.

From complete glass shop fronts and entrances to office partitioning systems and shower cubicles - Vista have a range of fittings to meet your needs.

Available in a wide variety of glass thicknesses and finishes, we can help you construct the perfect glass environment.

Find out about using our innovative products and proven customer service.

GET IN TOUCH TODAY ON 01730 719 292

CONTENTS

THE RETAILIA RANGE	11
THE PRIMELINE RANGE	19
DOOR CONTROLS & ANCILLARY PRODUCTS	35
THE IGLU RANGE	41
THE DORMA RANGE	57



We're very accommodating

We stock fittings to cater for a wide range of glass thicknesses.

What you need. When you need it.

When you've got a deadline to meet, we can deliver what you need, when you need it. At Vista, we always maintain stock and your order will be with you just when you need it - using our 30-minute despatch service, delivery is usually within 2 hours in Central London!







THE RETAILIA RANGE

Tailor-made glass fittings for frameless glass entrances



New revolutionary secret clip on technology - No more allen keys, dropping off or jamming of covers and pins

Better materials for durability - Aluminium alloys, LM6, Zinc alloys (Zamak), 5 Grade Stainless Steel (304)

CONNECTORS & PATCHES

RETAILIA PIVOTS

New revolutionary secret clip on technology - No more allen keys, dropping off or jamming of covers and pins Better materials for durability - Aluminium alloys, LM6, Zinc alloys (Zamak), 5 Grade Stainless Steel (304) Finish: Satin and Polished Stainless Steel




Bottom Pivot Patch Fitting

Ref: G0.10D

Note: **Bottom insert : Cast Steel** secured with M8. Fixing screws







NB: All dimensions are in mm unless otherwise stated.

Top Pivot Patch Fitting

Ref: G0.20

Note: Self lubricating Bronze top insert. No need for regular lubrication.








Overpanel to Sidepanel Pivot Patch Fitting

Ref: G0.40



Overpanel to Sidepanel Blank Patch Fitting

Ref: G0.40.1








Top Pivot Patch Fitting for use with Transom Closer

Ref: G0.22








Overpanel Pivot Patch Fitting

Ref: GO.30

Note: Mounting Plate, Fixing Screws, Wall Plugs & **Brass Anchors**








Bottom Pivot Patch Fitting Ref: G0.40.2





Bottom Pivot Patch Fitting Ref: G0.41 L or R

Note: Left hand and right hand fitting. Options for blank/ stop inserts.



CONNECTORS & PATCHES

New revolutionary secret clip on technology - No more allen keys, dropping off or jamming of covers and pins Better materials for durability - Aluminium alloys, LM6, Zinc alloys (Zamak), 5 Grade Stainless Steel (304)











NB: All dimensions are in mm unless otherwise stated.

Overpanel Stop Patch Ref: G0.70







Connector Fitting

Ref: G0.80

• Adjoins four glass panels





LOCKS & STRIKE BOXES

Revolutionary secret clip on technology - No more allen keys, dropping off or jamming of covers and pins Latch bolt loaded with hardened steel rods - Tamper-proof bolt with hardened rods for greater security Lock with excellent functional reliability - No more rusting, jamming & riveting Better materials for durability - Aluminium alloys, LM6, Zinc alloys (Zamak), 5 Grade Stainless Steel (304)



Bottom/top Patch lock

Ref: GOA.100

• With 20mm Throw & Security Profile Escutcheon





Centre Patch lock

Ref: GOA.200

• With 20mm Throw & Security Profile Escutcheon







Centre Lock Strike Keeper Patch Fitting

Ref: GOR.200









Better materials for durability - Aluminium alloys, LM6, Zinc alloys (Zamak), 5 Grade Stainless Steel (304)

DOOR RAILS

100m & 76.5m rail height options Clever wrap around end caps No more rusting, jamming & riveting

LOCKS & STRIKE BOXES



Single Overpanel Strike Box Fitting Ref: GOR.100








NB: All dimensions are in mm unless otherwise stated.

Double Overpanel Strike Box Fitting Ref: GOR.100A





Top Non-locking Ref. No: R102 - 100mm Ref. No: R002 - 76.5mm




Top Non-locking Ref. No: R112 - 100mm Ref. No: R012 - 76.5mm



Overpanel to Sidepanel Strike Box c/w Fin Ref: GOR.100BR/BL








Overpanel to Sidepanel Strike Box Ref: GOR.100C







Bottom locking Ref. No: R101 - 100mm Ref. No: R001 - 76.5mm



Bottom Non-locking Ref. No: R111 - 100mm Ref. No: R011 - 76.5mm





SOLENOID AND SHEAR MAG LOCKING OPTIONS AVAILABLE FROM STOCK



THE PRIMELINE RANGE

Tailor-made glass fittings for office fit out

PIVOT PATCHES

Better materials for durability - Aluminium/Zinc Alloys; LM6 Grade; Secret clip on covers; 304 Grade stainless cover; High Quality Rubberised Gasket To suit 10mm and 12mm Glass

Finish: Polished and Satin Stainless Steel



Bottom Patch

Ref:PL10SS

- Maximum door weight 100kg
- Maximum door width 1100mm







NB: All dimensions are in mm unless otherwise stated.

Top Patch

Ref:PL20SS

- Maximum door weight 100kg
- Maximum door width 1100mm








Overpanel Pivot Patch

Ref:PL30SS

Side Fix Plate

Ref:GF10







Ref:PL30.1SS

Overpanel Blank Patch



PRIMELINE PATCHES

Better materials for durability - Aluminium/Zinc Alloys; LM6 Grade; Secret clip on covers; 304 Grade stainless cover; High Quality Rubberised Gasket To suit 10mm and 12mm Glass Finish: Polished and Satin Stainless Steel



Overpanel Stop Patch

Ref:PL30.2SS





Double Overpanel Stop Patch

Ref:PL70SS






Side / Overpanel Pivot Patch

Ref: PL40SS








Side/Overpanel Blank Patch

Ref: PL40.1SS








Side / Overpanel Stop Patch

Ref: PL40.2SS





PRIMELINE

DUO OFFSET PATCHES

To Suit 44mm Frame Depth

Door Width 1100mm Max

DUO OFFSET PATCHES

Finish: Brushed Stainless Steel, 304 Grade Suits 10mm - 12mm Glass Thicknesses; To Suit 44mm Frame Depth Door Weights 100kg Max Door Width 1100mm Max



Left-hand Offset Bottom Pivot Ref: PL106SS



NB: All dimensions are in mm unless otherwise stated.

Right-hand Offset Bottom Pivot Ref: PL107SS



Left-hand Offset Top Pivot Ref: PL118SS



Right-hand Offset Top Pivot Ref: PL119SS



Left-hand Offset Bottom Pivot Ref: PL106EXTSS

• Extended to suit drop seal



Right-hand Offset Bottom Pivot Ref: PL107EXTSS

• Extended to suit drop seal



Left-hand Offset Top Centre Ref: PL152SS



Right-hand Offset Top Centre Ref: PL153SS

No breakage; 304 Grade stainless Secret clip on covers; High Quality Rubberised Gasket

Corner Patch Lock Ref: USP10SS

Better Materials For Durability - Aluminium/Zinc Alloys; LM6 Grade;

LOCKS & STRIKES

Finish: Polished and Satin Stainless Steel

PIVOTS & HINGES

- Secret clip on covers
- Clever height adjustment
- 304 Grade Stainless Steel



Offset Pivot Set

Ref: PL592RH Din Right Ref: PL593LH Din Left

- Free swing offset pivot
- Handed LH/RH
- Height adjustable
- To suit 10/12mm glass
- Brushed Stainless Steel
- Max door weight 80kg



NB: All dimensions are in mm unless otherwise stated.

Ref: PL806

- To suit rebated frame
- Adjustable closing speed
- Max door weight 100kg
- Max door width 1000mm





Centre Patch Lock

Ref: USP20SS







Lift-Off Glass Hinges

Ref: PL101R Din Right Ref: PL101L Din Left

- Brushed Stainless Steel Finish
- To suit 10/12mm glass
- Max door weight 60kg 3 hinges
- Supplied with machine screws & wood screws



Hinge

Ref: PL1310

- Side hung hinge
- To suit rebated frame
- Brushed Stainless Steel finish
- Max door weight 60kg per pair



Centre Strike

Ref: GKP50SS





LOCKS & STRIKES

Better materials for durability Aluminium Alloys; LM6 Grade; Zinc Alloys; Zamak 5 Grade Stainless Steel; 304 Grade; High Quality Rubberised Gasket; No breakage; Better flexibility Water - oil resistant, Rubberised for better grip



Latch

Ref: PL200

- •Stainless Steel covers
- •Suits 10-12mm glass thickness







Locking Latch Ref: PL202

- •Stainless Steel covers
- •Suits 10-12mm glass thickness Note: Accepts Europrofile Cylinder







Strike Box

Ref: PL220







Return To Door Lever handle

Ref: 10.301.700PL

- Many other styles available
- 19mm tube diameter



Option of bolt through or retro fit with saddle bracket



Overhead Door Closer

Ref: TS3204SEBT

- Power Adjustable En 1-4
- Adjustable Closing & Latching Speeds

NB: All dimensions are in mm unless otherwise stated.

- Hold Open Arm Option Available
- Silver Grey Finish





Overhead Door Closer

Ref: TS9205SSBT

- Power Adjustable En 2-5
- Adjustable Closing & Latching Speeds
- Hold Open Arm Option Available
- Satin Stainless Steel Finish





Overhead Door Closer

Ref: TS9205SE

- Power Adjustable En 2-5
- Adjustable Closing & Latching Speeds
- Hold Open Arm Option Available
- Silver Grey Finish
- 10mm glass only



SLIDING DOOR SYSTEMS

• 120kg Max Door Weight

• Cut To Size Length Available

• Stock Length 5000mm. • Available in Powder Coated Grey, White or Anodised Aluminium



Sliding Track Satin Anodised Ref: PL120T



Accessory Pack

Ref: PL120AP

- 2 No. Sliding Rollers Max Weight 120kg
- 2 No. Door Stops
- 1 No. Adjustable Floor Guide
- To Suit 10mm 12mm Glass



Sliding Track White

Ref: PL120T9010

• RAL9010 30% Gloss



Sliding Track Grey

Ref: PI 120T9006

• RAL9006 30% Gloss



GLAZING CHANNELS Finish Options: 316 Grade Brushed Stainless Steel


SLIDING DOOR SYSTEMS



Sliding Track Satin Anodised

Ref: PL120SPTR

With glazing pocket





NB: All dimensions are in mm unless otherwise stated.


Sliding Track Grey Ref: PL120SPTR9006

• RAL9006 30% Gloss



Sliding Track White Ref: PL120SPTR9010

• RAL9010 30% Gloss



Infill Section Ref: PL120IF

Ref: PL120IF9006 Ref: PL120IF9010





Accessory Pack Ref: PL120AP

- 2 No. Sliding Rollers Max Weight 120kg
- 2 No. Door Stops
- 1 No. Adjustable Floor Guide
- To Suit 10mm 12mm Glass



Infill Section

Ref: PL082/F

- Clip-in infill piece to suit door openings
- Available in RAL9006/9010
- Max length 3000mm



U-Channel One Piece

Ref: PI 082

- 1 Piece U-Channel
- Available in RAL9006/9010
- Max length 3000mm



PL078 Base and PL079 Bead

Ref: PL078 / Ref: PL079

- 2 piece base channel
- Available in RAL9006/9010
- Max length 3000mm



Glass Gasket

10mm glass Ref: PL082G10 12mm glass Ref: PL082G12




DRY JOINTS

3000mm lengths of dry glazing joints make partition glazing quick and mess free. No more silicone. A joint for every angle.




135° Corner 10mm - Ref: 2248 12mm - Ref: 2249



90° Corner

10mm - Ref: 2128 12mm - Ref: 2129




180° Inline

10mm - Ref: 2105 12mm - Ref: 2106



90° 3-Way T

10mm - Ref: 2200 12mm - Ref: 2201



90° Abutment

10mm - Ref: 2178 12mm - Ref: 2179





NB: All dimensions are in mm unless otherwise stated.

DRAUGHT SEALS

Excellent range to cover most applications. From simple but effective draft excluders to acoustic drop down seals.



Acoustic Door Seal

Ref: QSP10BS - to suit 10mm glass Ref: QSP12BS - to suit 12mm glass

- Drop down bulb seal
- To suit maximum door sizes of 930mm, 1030mm and 1130mm



Ref: QS912

3M VHB Tape suitable for all environments including showers. 12 metre roll



Fin Seal

Ref: QS812

3M VHB Tape suitable for all environments including showers. 3 metre length





Bottom Door Seal REF: QS28B

- Stick on bulb strip
- Self levelling spring system
- To suit maximum door sizes of 930mm, 1030mm and 1130mm



Application Tool Ref: QSTOOL

• Application tool to suit 6 different glass thicknesses PRIMELINE

DOOR CONTROLS

Hold-open/non hold-open options Adjustable/non adjustable power options Oversized cover plates available





NB: All dimensions are in mm unless otherwise stated.

Ref: FS005HO - 90° HOLD-OPEN Ref: FS005NHO - NON HOLD-OPEN

- EN 1-4
- Max door width:1100mm
- Max door weight: 150kg
- Adjustable closing force
- Adjustable latching speed
- Optional mechanical hold-open/non hold-open

SPINDLE EXTENSIONS AVAILABLE





FS003RSXP

Ref: FS003RSHOXP - 90° HOLD-OPEN Ref: FS003RSNHOXP - NON HOLD-OPEN

- EN 3
- Max door weight: 120kg
- Adjustable closing speed
- Adjustable latching speed
- Optional mechanical hold-open/non hold-open

285

DOOR CONTROLS

Coverplate Ref: 7510



BTS75V Floorspring Unit

Ref: YT5011.0107 - 90° HOLD-OPEN Ref: BTS75VNHO - NON HOLD-OPEN

- EN 1-4
- Max door width:1100mm
- Max door weight: 120kg
- Adjustable closing force
- Adjustable latching speed
- Optional mechanical hold-open/non hold-open

SPINDLE EXTENSIONS AVAILABLE


Coverplate Ref: 7511



BTS80

Ref: YT5011.02407 (EN 4) Ref: YT5011.02607 (EN 6)

- Fixed size EN4 or 6 please specify.
- Max door width:1100mm
- Will exert an opening force of 30N or less when fitted to a fire door
- (Size EN3) measuring 767mm and above
- Max door weight: 300kg
- Adjustable closing force
- Adjustable latching speed
- Optional mechanical hold-open/non hold-open




COFFIN BOXES

To suit all Retailia/Dorma Floorspring for raised floor installations Oversize coverplates to suit available



7516 - To suit BTS75









NB: All dimensions are in mm unless otherwise stated.

7517 - To suit BTS80

358


82







DOOR CONTROLS



RTS 85 Transom Closer

Ref: RTS85

- Transom concealed closer (EN 3/4/5)
- Max door width: 950mm (EN 3), 1100mm (EN 4), 1250mm (EN 5)
- 2 valve control of closing speed
- Mechanical backcheck / hold-open option
- Independently tested to EN 1154




Self Close Patch Fitting

Ref: PLM10SS

- No cut-outs required in floor
- Adjustable closing and latching speed
- 90° hold-open
- Max door weight 100kg



FS003CBX -To suit FS003










FS005CBX -To suit FS005











04.602 Floor Pivot

Ref: 04.602

- Floor bearing with DORMA profile spindle
- Spindle extension up to 20 mm on request)
- Steel
- Max. door weight 200kg Art No. 04.602







Free Swing Pivot Ref: PL4602

• 50mm x 72mm



DOOR STOPS & HANDLES

316 Grade Stainless Steel 304 Grade Satin Stainless Steel



Angle Head Stop Ref: 2116AHS





NB: All dimensions are in mm unless otherwise stated.

Floor Stop Ref: XU6002.2107



- Satin Stainless Steel finish
- Floor mounted C/W fittings







D Shaped Pull Handle -19mm dia.

Ref: 10.501.1000.19SS 1000mm Centres x 19mm Dia. Ref: 10.501.300HSS 300mm Centres x 19mm Dia. Ref: 10.501.600HSS 600mm Centres x 19mm Dia.

T Shaped Pull Handle -19mm dia.

Ref: 10.501.1200.19ss 1200mm o/a, 1000mm c/c Ref: 10.501.1000.19sss 1000mm c/a, 800mm c/c Ref: 10.501.700.19ss 700mm c/a, 600mm c/c Ref: 10.501.600.19ss 600mm o/a, 500mm c/c

Manet Pull Handle -25mm dia.

Ref: 10.720ss 720mm, with 2 fixings at 520mm Centres Ref: 10.1240ss 1240mm, with 3 fixings at 520mm Centres Ref: 10.1760ss 1760mm, with 4 fixings at 520mm Centres



Euro Profile Cylinder and Turn

Ref: 10.601BKD

- Satin chrome plate
- 5 Pin c/w keys
- 60mm overall

Keyed alike version available

Ref: 10.601KA

ANCILLARY PRODUCTS

A range of quality accessories all designed to coordinate with your Primeline or Retailia fittings.



Euro Profile Double Cylinder (keved to differ)

Ref: 10.603KD

- Satin chrome plate
- 5 Pin c/w keys
- 60mm overall



Ref: 10.603KA



Lock Keep Ref: 05.190

- 32mm x 94mm • 15mm adjustable C/W fitting

32 0 🔘 0



Fixed Top Centre

Ref: GP10

• 15mm dia pivot with fixing plate material thickness 3mm

28 0 0



Lock Keep Ref: PL5193



Easy Clean Floor Socket

Ref: 05.195



Screw in Top Centre

Ref: GP20




THE IGLU RANGE

Tailor-made glass fittings for showers and wetrooms



Express Service

30-minute express collection service from our **Barking Collection Point**

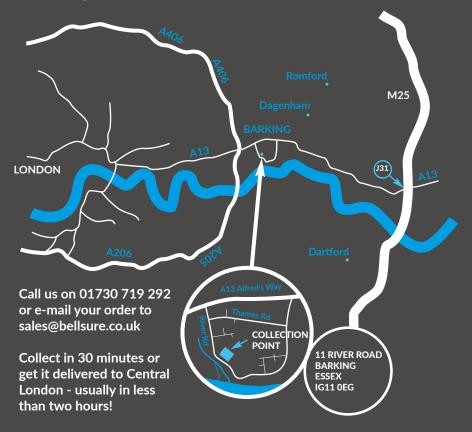

30-minute desptach Same-day delivery into London

THE IGLU RANGE PROFILES

There are four different profiles in the Iglu range, each with its own style to suit the project.



NB: All dimensions are in mm unless otherwise stated.

IG

IG SERIES Square chamfer profile



JG

JG SERIES Square linear profile



KG

KG SERIES Contour profile



LG SERIES Bevel chamfer profile

To suit 8, 10, 12mm glass

Finish: Polished or Satin Chrome

IG RANGE - CLAMPS

IG RANGF - HINGES

To suit 8, 10, 12mm glass

Max door weight 36kg Finish: Polished or Satin Chrome Choice of fully adjustable closing position or non adjustable



90° Hinge

Ref: IG.90AGGPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: IG.90GGPC / SC

- 90° glass-glass hinge
- Self closing from 15°



90° Hinge

Ref: IG.90AGWPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: IG.90GWPC / SC

- 90° glass-glass hinge
- Self closing from 15°



90° Hinge

Ref: IG.901AGWPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: IG.901GWPC / SC

• 90° glass-glass hinge



135° Hinge

Ref: IG.135AGGPC / SC

- 135° glass-glass hinge
- Adjustable fitting

Ref: IG.135GGPC / SC

- 135° glass-glass hinge
- Self closing from 15°

180° Hinge

Ref: IG.180AGGSC / PC

- 180° glass-glass hinge
- Adjustable fitting

Ref: IG.180GGPC / SC

- 180° glass-glass hinge
- Self closing from 15°





90° Clamp Ref: IGC.90PC / IGC.90SC



90° Clamp Ref: IGC.90WPC / IGC.90WSC



135° Clamp Ref: IGC.135PC / IG.C135SC



180° Clamp Ref: IGC.180PC / IG.C180SC



180° Clamp Ref: IGC.180PC / IGC.180SC



180° Clamp Ref: IGC.180SC / IGC.180PC

with your Primeline fittings.

JG RANGE - CLAMPS

A range of quality accessories designed to co-ordinate

JG RANGE - HINGES

- To suit 8, 10, 12mm glass / available in polished or satin chrome
- Max. weight 38kg
- Choice of fully adjustable or non-adjustable closing positions



90° Hinge Ref: JG.90AGWPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: JG.90GWPC / SC

- 90° glass-glass hinge
- Self closing from 15°



90° Hinge Ref: JG.90AGGPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: JG.90GGPC / SC

- 90° glass-glass hinge
- Self closing from 15°



NB: All dimensions are in mm unless otherwise stated.

135° Hinge Ref: JG.135AGGPC / SC

- 135° glass-glass hinge
- Adjustable fitting

Ref: JG.135GGPC / SC

- 135° glass-glass hinge
- Self closing from 15°



180° Hinge

Ref: JG.180AGGSC / PC

- 180° glass-glass hinge
- Adjustable fitting

Ref: JG.180GGPC / SC

- 180° glass-glass hinge
- Self closing from 15°



90° Hinge

Ref: JG.901AGWPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: JG.901GWPC / SC

• 90° glass-glass hinge



Ref: JGC.90PC / JGC.90SC



90° Clamp Ref: JGC.90WPC / JGC.90WSC




90° Clamp Ref: JGC.90WFFPC / JGC.90WFFSC



135° Clamp Ref: JGC.135PC / JGC.135SC



180° Clamp Ref: JGC.180PC / JGC.180SC



180° Clamp Ref: JGC.180WSC / JGC.180WPC

• To suit 8, 10, 12mm glass

KG RANGE - HINGES

- To suit 8, 10, 12mm glass
- Max door weight 36kg
- Single sided wall fixing*
- Available in Polished or Satin Chrome
- Only available non adjustable



90° Hinge Ref: KG.90GGPC / SC

- 90° glass-glass hinge
- Self closing from 15°



90° Hinge Ref: KG.90GWPC / SC

- 90° glass-glass hinge
- Self closing from 15°



135° Hinge

Ref: KG.135GGPC / SC

- 135° glass-glass hinge
- Self closing from 15°



180° Hinge

Ref: KG.180GGPC / SC

- 180° glass-glass hinge
- Self closing from 15°





NB: All dimensions are in mm unless otherwise stated.

90° Clamp Ref: KGC.90PC / KGC.90SC



KG RANGE - CLAMPS

Available in Polished or Satin Chrome


90° Clamp Ref: KGC.90WFFSC / KGC.90WFFPC



90° Clamp KGC.90WPC / KGC.90WSC



135° Clamp Ref: KGC.135PC / KGC.135SC



180° Clamp Ref: JGC.180PC / JGC.180SC



180° Clamp Ref: JGC.180WPC / JGC.180WSC

LG RANGE - HINGES

- To suit 8, 10, 12mm glass Max door weight 42kg
- Available in Polished or Satin Chrome
- Choice of fully adjustable or non-adjustable closing positions



- Ref:LG.90GGPC / SC • 90° glass-glass hinge
- Self closing from 15°



NB: All dimensions are in mm unless otherwise stated.

90° Hinge

Ref: LG.90AGWPC / SC

- 90° glass-glass hinge
- Adjustable fitting

Ref: LG.90GWPC / SC

- 90° glass-glass hinge
- Self closing from 15°



135° Hinge

Ref: LG.135GGPC / SC

- 135° glass-glass hinge
- Self closing from 15°

SNAP ON COVERS FOR THE PERFECT **FINISH**



180° Hinge

Ref: LG.180GGPC / SC

- 180° glass-glass hinge
- Self closing from 15°

KNOB SETS

• To suit 8, 10, 12mm glass • Available in Polished or Satin Chrome



Ref: IKP02SC / PC



Square Knob Ref: IKP01SC / PC



Circular Knob Ref: IKP03SC / PC



Circular Barrel Knob Ref: IKP04SC / PC



GLAZING CHANNELS

• To suit 10/12mm glass

• Satin or polished aluminium finish

• 2800mm or 2000mm length

SHOWER SEALS

- Clear acrylic seals
- Easy clip-on fit
- 3000mm lengths



Waterproof Strip glass door side

Ref: ISO208 - 8mm Ref: ISO210 - 10mm Ref: ISO212 - 12mm



NB: All dimensions are in mm unless otherwise stated.

Channel IC1912L

channel)

17.22W x 19.05H (13.16 wide channel) IC1912S 17.22W x 19.05H (13.16 wide



Channel IC1012L

17.1W x 9.05H (13.1 wide channel) IC1012S 17.1W x 9.05H (13.1 wide

channel)



Channel IC1910L

14.3W x 19.0H (10.2 wide channel) IC1910S 14.3W x 19.0H (10.2 wide

channel)



Channel IC1010L

14.3W x 9.53H (10.24 wide channel) IC1010S

14.3W x 9.53H (10.24 wide channel)





Ref: ISO412 - 12mm



Ref: ISO410 - 10mm





Bulb Seal Waterproof

ISO608 - 8mm ISO610 - 10mm ISO612 - 12mm





ITS10

Ref: ITS10

- Assists water flow back into shower
- 1500mm length



Magnetic Strip

BAR CONNECTORS / GLASS CONNECTOR CLAMPS

- Satin or Polished chrome19mm diameter



Bar Connector 90° Ref: ISB06PC / ISB06SC

• 19mm diameter



NB: All dimensions are in mm unless otherwise stated.

Connector Clamp 90° Ref: ISB0408PC / ISB0468SC

- 19mm diameter
- To suit 6-8mm glass



Connector Clamp 90° Ref: ISB041012PC / ISB041012SC

- 19mm diameter
- To suit 10-12mm glass



Connector Clamp 90° Ref: ISB0568PC / ISB0568SC

- 19mm diameter
- To suit 6-8mm glass



Connector Clamp 90° Ref: ISB051012PC / ISB050125SC

- 19mm diameter
- To suit 10-12mm glass

STABILISER BARS/WALL END CONNECTING SLEEVES

Satin or Polished chrome



Stabiliser Bar

Ref: ISB010PC - 1000mm Ref: ISB013PC - 1300mm

• 19mm diameter



Stabiliser Bar

Ref: ISB010SC - 1000mm Ref: ISB013SC - 1300mm

• 19mm diameter





Sleeves Ref: ISB03PC / ISB03SC

• 19mm diameter





Ref: ISB03SLPC / ISB03SLSC

• 19mm diameter



• Available in Satin/Polished Stainless Steel or Satin Anodised Aluminium finish


PIVOT PATCHES

• To suit 10/12mm glass as standard

• 15, 19mm and 21.5mm fittings available

PIVOT PATCHES

- Available in Satin/Polished Stainless Steel or Satin Anodised Aluminium finish
- To suit 10/12mm glass as standard
- 15, 19mm and 21.5mm fittings available




Bottom Patch

Ref: PT10

• with insert for DORMA floor spring spindle






NB: All dimensions are in mm unless otherwise stated.

Top Patch

Ref: PT20

• with plastic socket for top pivot






Top Patch

Ref: PT22

• with insert for DORMA RTS transom closer






Overpanel Pivot Patch Fitting

Ref: PT30

• with pivot 15mm Ø, with M8 tapped hole at side






Overpanel Blank Patch Fitting

Ref: PT30.1

• with blank insert






Overpanel Stop Patch Fitting

Ref: PT30.2

• with stop insert





Wall Anchor


Ref: PT33WA

• with thread M8 for overpanel patch PT 30



Fixing Plate Ref: PT34SFP

for overpanel patch PT 30




Threaded rod Ref: PT35TR

• M8 with plug for overpanel patch PT 30.

PIVOT PATCHES / CONNECTORS


- Available in Satin/Polished Stainless Steel or Satin Anodised Aluminium finish
- To suit 10/12mm glass as standard
- 15, 19mm and 21.5mm fittings available



Pivot Patch for Overpanel & Sidelight

Ref: PT40






Blank Patch for Overpanel & Sidelight

Ref: PT40.1






Patch for Overpanel & Sidelight

Ref: PT40.2





Patch for Overpanel & Sidelight with Fin

Ref: PT41DRH - Right handed Ref: PT41DLH - Left handed




PIVOT PATCHES / CONNECTORS

• Available in Satin/Polished Stainless Steel or Satin Anodised Aluminium finish

• To suit 10/12mm glass as standard


• 15, 19mm and 21.5mm fittings available



Overpanel Patch with Angled Connector Ref: PT42DRH - Right handed

Ref: PT41DLH - Left handed






Connector

Ref: PT60






Overpanel Connector

Ref: PT70

• with pivot 15mm Ø, with M8 tapped hole at side





Overpanel Connector

Ref: PT71

• with fin fitting




CORNER LOCKS

• 15mm and 19mm fittings available

Anodised Aluminium

DORMA PATCHES / CONNECTORS


- Available in Satin/Polished Stainless Steel or Satin Anodised Aluminium finish
- To suit 10/12mm glass as standard
- 15, 19mm and 21.5mm fittings available



Connector Ref: PT80




Ref: PT80.90




NB: All dimensions are in mm unless otherwise stated.

135° Connector


Ref: PT80.35




Connector Ref: PT81



Screw On Fitting Ref: PT90



Corner Fitting Ref: PT91




Side Connector Ref: 01.153


Aluminium Round Profile

Ref: 03.380

for pinch free doors with 65mm pivot point, consisting of 2 halves, prepared for Universal fittings or door rails (76.5mm or 100mm).


Please indicate: Panel height (max. 2500mm, higher dim. on request) Required preparation of the profile for top and bottom fittings





Corner Lock Ref: US10

Prepared for Europrofile cylinder single throw bolt projection 20mm



• Available in Satin/Polished Stainless Steel and Satin

Single Overpanel Strike Box


Ref: GK30

to suit US 10 corner lock

with Stop Ref: GK30.1

L/H, R/H






Double Overpanel Strike Box

Ref: GK20

to suit US 10 corner locks, consisting of two GK 30 with threaded connecting bolt

with Stops

Ref: GK20.1



Corner Overpanel Strike Box

Ref: GK40


to suit US 10 corner lock

with Stop LH

Ref: GK40.1


CENTRE LOCKS & STRIKES

• Available in Satin/Polished Stainless Steel and Satin Anodised Aluminium

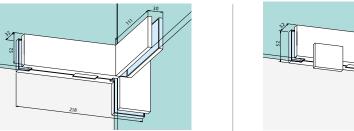

Strike Box

Ref: GK41DLH - left hand Ref: GK41DRH - right hand




NB: All dimensions are in mm unless otherwise stated.

90° / 135° Strike Box

Ref: GK42DLH - left hand Ref: GK42DRH - right hand




centre lock



Strike Box


Ref: US20

prepared for Europrofile cylinder, single throw, bolt projection 20mm



CORNER & CENTRE LOCKS


• Available in Satin/Polished Stainless Steel and Satin Anodised Aluminium



Corner Lock

Ref: 05.100


for vertical or horizontal fixing, double throw, bolt projection 20mm prepared for Europrofile cylinder



Strike Box

Ref: 05.108


to suit corner lock (05.100) for single door without stop



Slide Over Corner Lock

10mm glass Ref: 05.106 12mm glass Ref: 05.130

for retro-fitting, double throw, bolt projection 20mm, Europrofile cylinder




Slide Over Strike Box

10mm glass Ref: 05.112 12mm glass Ref: 05.132

for slide over corner lock for single door

OFFSET EA PATCH FITTINGS


• For offset hung doors in rebated frames



Bottom Patch

Ref: 02.160LH Ref: 02.161RH


to suit DORMA floor spring spindle



NB: All dimensions are in mm unless otherwise stated.

Top Patch - 24mm stop depth


Ref: 02.166LH Ref: 02.167RH



Bottom Patch

Ref: 02.106LH Ref: 02.107RH

to suit DORMA floor spring spindle or round pivot



Top Patch Ref: 02.118LH

Ref: 02.119RH

OFFSET EA PATCH FITTINGS

• For offset hung doors in toughened glass assemblies


Top Patch - 24mm rebate

Ref: 02.206LH Ref: 02.207RH

Complete with pivot for frame fixing

Top Patch - 40mm rebate


Ref: 02.208LH Ref: 02.209RH




Top Patch

Ref: 02.200LH Ref: 02.201RH

Complete with pivot for sidelight






Top Patch

Ref: 02.204LH Ref: 02.205RH


Complete with pivot for frame fixing





OFFSET TOP CENTRES


Note: If corner fittings / door rails are combined with frame top centres, please indicate rebate depth with order



Frame Top Centre

Ref: 02.150

with fixing block




NB: All dimensions are in mm unless otherwise stated.

Frame Top Centre

Ref: 02.151


with angle bracket



Frame Top Centre

Ref: 02.152LH Ref: 02.153RH


only for steel frames, with special wedge screw fixing




DOOR RAILS

• 100 or 76.5mm rail heights

Available in Satin/Polished Stainless Steel, Mill or Anodised Aluminium finish
 Rails to suit 13.5mm, 15mm, 19mm glass available from stock

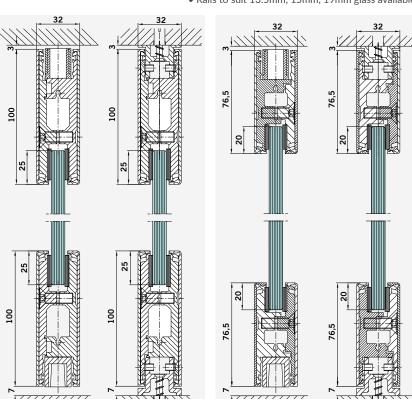



Door Rails

100mm high


Aluminium Profile Brush Seal

Side Panel Rails

100mm high

Ref: 04.600

to prevent draughts and energy loss connected with door rail at manufacturer



Door Rails

76.5mm high

Rubber Sealing

Side Panel Rails

76.5mm high

Ref: 04.607 for door rails fix length

Ref: 04.608

for door rails fix length



DOOR RAILS

- 100 or 76.5mm rail heights
- Available in Satin/Polished Stainless Steel, Mill or Anodised Aluminium finish
- Rails to suit 13.5mm, 15mm, 19mm glass available from stock




with Stainless Steel insert to suit DORMA floor spring spindle

100mm: Ref: 04111 76.5mm: Ref: 04011

76.5mm: Ref: 04001

with floor locking lock, Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin



NB: All dimensions are in mm unless otherwise stated.


Top Rail

100mm: Ref: 04102 76.5mm: Ref: 04002

with insert to take15 mm Ø pivot pin

100mm: Ref: 04112 76.5mm: Ref: 04012


and top locking lock, Europrofile cylinder, single throw with corrosion resistant bolt and hardened safety roll pin



Top Rail (for RTS85 Closer)

100mm: Locking Ref: 04116 Non-locking Ref: 04106 76.5mm: Locking Ref: 04016 Non-locking Ref: 04006


with insert for DORMA RTS transom closer



DOOR RAILS

• Side panel door rails

• Offset hung doors - Door rails for offset hung doors in toughened glass assemblies without rebated frames



Side Panel Bottom Rail


100mm: Ref: 04301 76.5mm: Ref: 04201

up to approx. 6000mm long with rail filler insert 7mm

Side Panel Top Rail

100mm: Ref: 04302 76.5mm: Ref: 04202

up to approx. 6000mm long with rail filler insert 3mm




Offset Hung Bottom Rail

100mm: Ref: 04.131/04.133 76.5mm: Ref: 04.031/04.033

76.5mm: Ref: 04051RH/04053LH with floor locking lock, single throw with corrosion resistant bolt and hardened safety roll pin

100mm: Ref: 04151RH/04153LH

Available for rebated and non rebated frames, frame depths of 24 or 40mm. Please ask for details.



ACCESSORIES / CLAMPING FITTINGS

Important information: For free hanging mounting of glass please use safety clamping fittings. Torque for fixing screws 15 (M 6=Allan key size 5). 20kg load for each clamping fitting.

Clamping Part

for 8mm glass thickness: Ref: 07.043

for 10mm glass thickness: Ref: 07.004

for 12mm glass thickness: Ref: 07.005

For safety type:


for 8mm glass thickness:

Ref: 07.063


for 10mm glass thickness:

Ref: 07.064

60mm long with screw and gasket Weight in kg/m: Aluminium 0.055



NB: All dimensions are in mm unless otherwise stated.



Clip On Cover Profile

Ref: 07.003

fixed length Ref: 07.053


6000mm stock length, Brass, Stainless Steel, Satin and Stainless Steel Polished door available



End Cap


Ref: 07.007

for 8 and 10mm glass thickness




STUDIO RONDO LOCKS & LEVERS

Available in Simulated Satin/Polished Stainless Steel or Satin Anodised Aluminium finish
 Locks with follower




Latch Ref: 10.200

Non-locking




Lock Ref: 10.202

prepared for Europrofile cylinder, nightlatch function



Strike Box Ref: 10.220

for pairs of doors




Lock Ref: 10.260

Non-locking



Ref: 10.301


Tubular, for follower



DORMA ACCESSORIES


JUNIOR OFFICE LOCKS, STRIKE BOXES & LATCHES

• Available in Simulated Satin/Polished Stainless Steel or Satin Anodised Aluminium finish




Lock Ref: 11.200LH Ref: 11.201RH

Europrofile cylinder, nightlatch function



Strike Box Ref: 11.206LH Ref: 11.207RH

For pairs of doors



NB: All dimensions are in mm unless otherwise stated.

Latch

Ref: 11.208LH Ref: 11.209RH


Non-locking, for use with levers on rose



Floor Pivot Bearing


Ref: 01.106

Height adjustable by 5mm max. door weight 100kg




Lock Keeper Plate Ref: 05.190

Stainless Steel, two parts, adjustable ± 5mm




Lock Ref: 11.260LH Ref: 11.261RH

Prepared for Europrofile cylinder, for use with levers without rose



Latch Ref: 11.264LH Ref: 11.265RH


Non-locking, for use with levers without rose



Set of Corner Hinges

Ref: 12.040LH Ref: 12.041RH


10mm glass thickness with free glass edge (for rebate) on top resp. underneath and at side door weight max. 80kg door width max. 1100mm



Floor Bearing

Ref: 04.602

with DORMA profile spindle max. door weight 200kg



Pivot Ref: PT25

15mm Ø with plug

DORMA ACCESSORIES


COMPACT SLIDING DOOR SYSTEMS


Floor Sockets

Aluminium: Ref: 05.193

with spring and plastic stopper, dirt protection

Eccentric Stainless Steel: Ref: 05.193 with adjustable plastic insert






NB: All dimensions are in mm unless otherwise stated.

Frame Portion

Ref: PT21


Top centre with removable pin 15mm Ø with cover plate



Pivot

3mm Ref: PT24 6mm Ref: PT46

15mm Ø with fixing plate





The aesthetic elegance of the MANET COMPACT concept is also available in the form of standardised sets for simple, fast planning of the more popular system types with 8, 10 or 12mm toughened safety glass (TSG). Optional accessories enable the individual sets to be semi-customised.


The system components offer numerous adjustment possibilities in order to ensure problem-free installation of whichever door type. Wall abutment profiles may need to be provided (by others) for fixing overpanels and sidelights.

The system components offer numerous adjustment possibilities in order to ensure problem-free installation of whichever door type.

Wall abutment profiles may need to be provided (by others) for fixing overpanels and sidelights.

Technical Help?

01730 719 292








COMPACT PIVOT DOORS

• Shown with 10mm glass

Pivoting Doors

Note: When used with 8 and 12mm glass measurements change accordingly

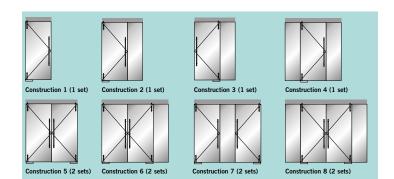


NB: All dimensions are in mm unless otherwise stated.


Pivoting Doors

Set 2





Pivoting Doors Set 3



SLIDING SYSTEMS

• Max. door weight 120kg

• Track/pelmet profiles cut to length



Track Profile Ref: 07.121

prepared for top or side fixing, fixed length



Sidelight Profile Ref: 07.122

connectable to track, non prepared, stock length 6000mm



Cover Profile

Ref: 07.140

for clip attachment with connecting web for view protection profile




End Cap

Ref: 07.129

track connected to wall track connected to ceiling left/right hand




Aluminium to be glued onto the glass



Set of Accessories

Ref: 07.125

consisting of: 2 carriers with clamping patches (8 and 10mm glass thickness) and support screw, 2 end stops with safety catch, 1 floor guide.





ARCHITECTURAL SUPPLIES & SOLUTIONS MADE SIMPLE

CONTACT US ON 01730 719 292

E info@bellsure.co.uk W bellsure.co.uk





