


CuvaCurve Compound Vented


Top View




Perspective View

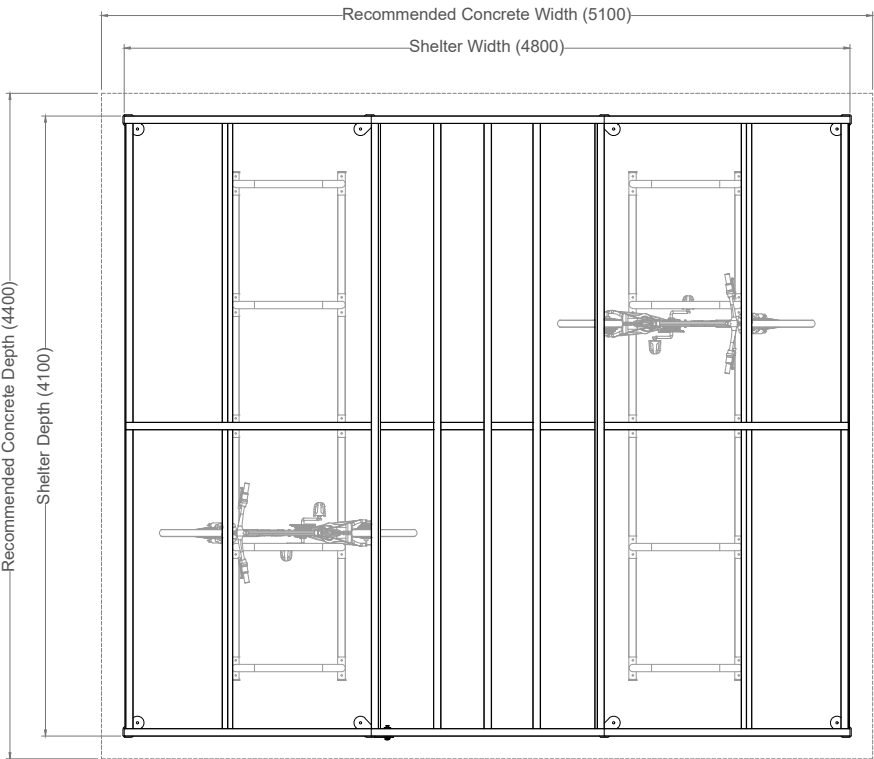

Front View

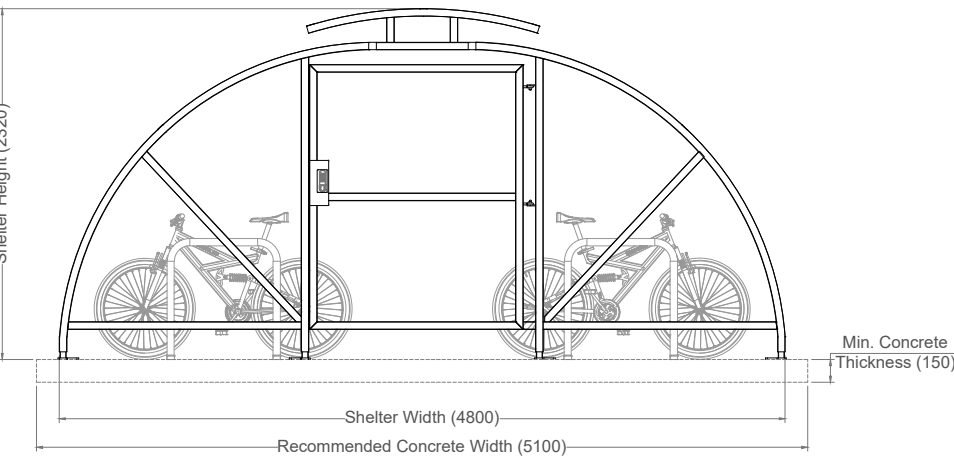

Side View

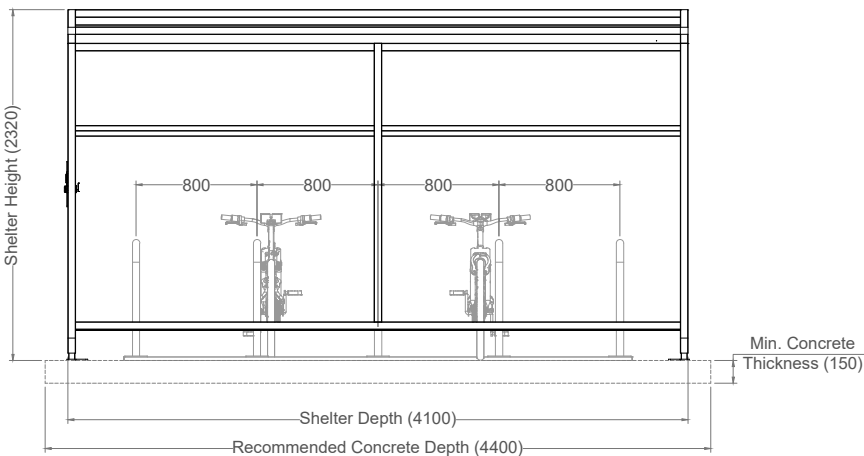

Technical information

Materials:	50 x 50mm SHS Frame
Standard Finish:	Galvanised to BS EN ISO 1461:2009
Optional Finishes:	Powder-coating to any standard RAL colour
Access:	1No. Hinged Door
Protection:	3mm PETG UV2 Clearview Roof and End Panels
Door Locking System:	Hasp and Staple as Standard (Padlock by others)
Dimensions:	4100mm W x 4800mm D x 2320mm H
Bike Capacity:	20 No Bike Spaces made up of 2 No 5 Bay Galvanised Toastracks or bespoke to customer's requirement
Bike Capacity (Based on 800mm center) / Length:	20no 4100mm 30no 6125mm 40no 8125mm 50no 10175mm 60no 12200mm 70no 14225mm 80no 16254mm 88no 18275mm 100no 20300mm
Fixing:	Surface Mounted with base plates
Optional Upgrades:	5mm PETG, Manual Digital Lock, Frame End Design
Optional Extras:	Location identifiers, signage
BREEAM:	Our products will assist with achieving BREEAM rating
Product Warranty:	Two years

PRODUCT NAME:

CuvaCurve Compound Vented

SCALE @ A3: 1:50	SHEET SIZE: A3	DRAWN BY: AA
CHECKED BY:	KD	DATE: 24/11/2025
PRODUCT NO. :	SS-CCRv	

- All dimensions are in mm unless otherwise stated
- Any dimensions scaled from this drawing are taken at the reader's own risk



Bellsure

01730 719 292
info@bellsure.co.uk
bellsure.co.uk