


Double-Sided DoubleDek 500


Top View




Perspective View

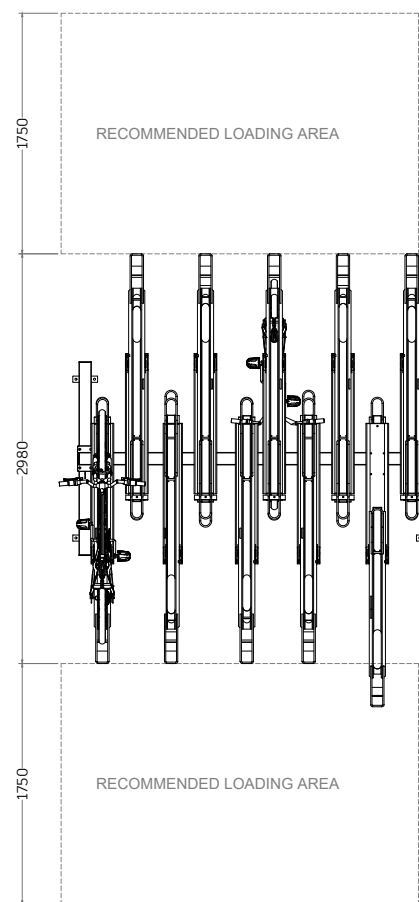

Front View

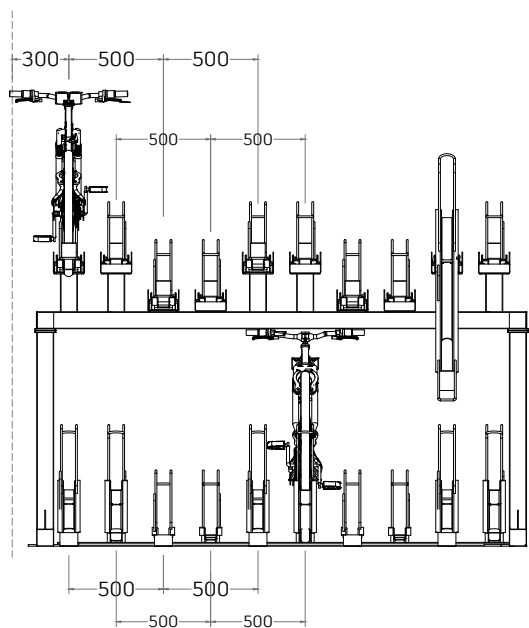

Right Side View

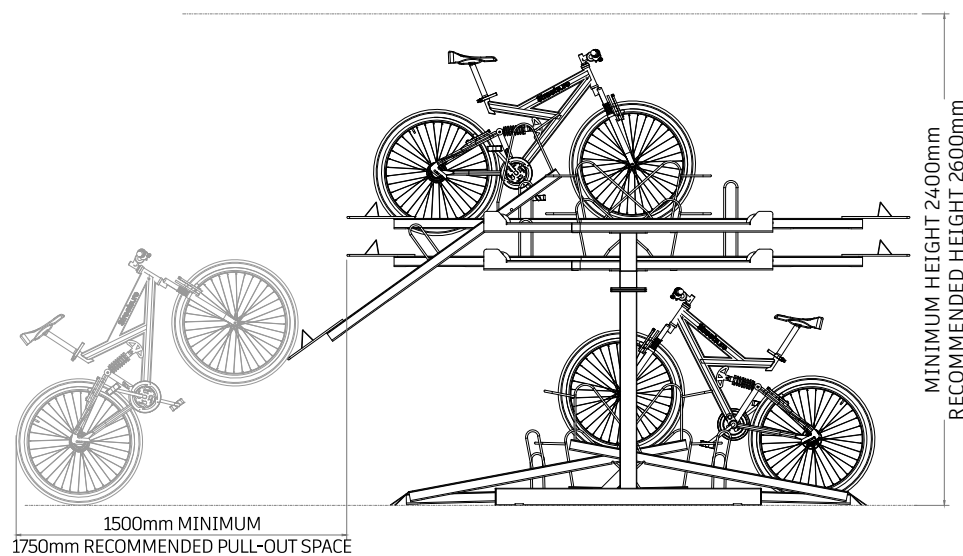

Technical information

Materials:	Mild Steel
Standard Finish:	Galvanised to BS EN ISO 1461:2009
Optional Finishes:	Powder-coating to support leg and frame
Handle Options:	Plascoated to any standard RAL colour
Configuration:	Double Sided
Bike Capacity:	Bespoke to customer specification
No. of Locking points:	3 per space - front wheel, rear wheel and locking loop
Fixing Options:	Surface Mounted
Optional Extras:	Location identifiers, signage
BREEAM:	Our products will assist with achieving BREEAM rating
Product Warranty:	Two years
Benefits:	This two-tier rack is built to last, it requires minimal maintenance and can be space planned to fit a variety of unique locations.
Minimum Height:	2400mm
Recommended Height:	2600mm

PRODUCT NAME:

**Double-Sided
DoubleDek 500**

SCALE: NTS	SHEET SIZE: A3	DRAWN BY: AA
CHECKED BY: BCB	DATE: 02/05/2025	
PRODUCT NO. :	DDCL500-DS	

- All dimensions are in mm unless otherwise stated
- Any dimensions scaled from this drawing are taken at the reader's own risk