


Double-Sided DoubleDek Plus 500 (Gas Assisted)


Top View




Perspective View

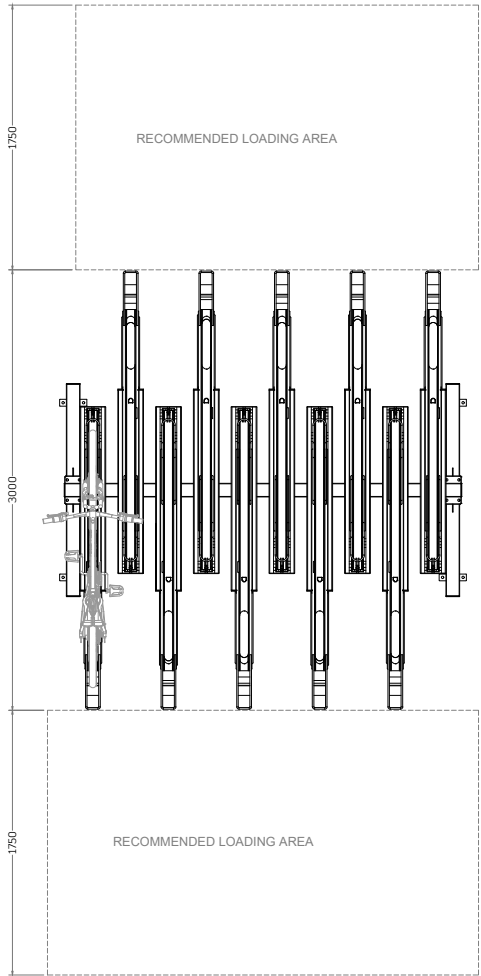

Front View

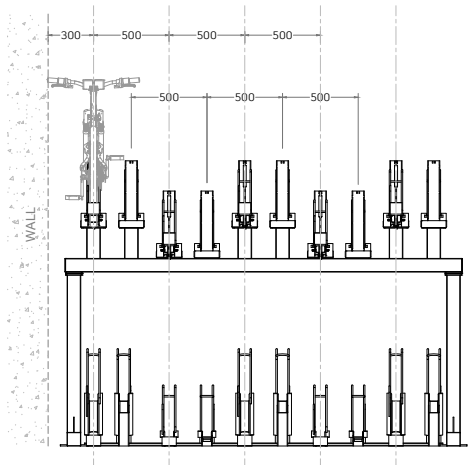

Right Side View

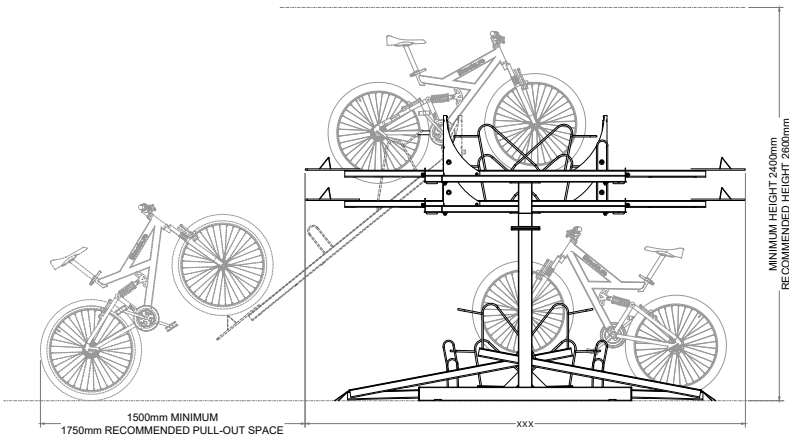

Technical information

Materials:	Mild Steel
Standard Finish:	Galvanised to BS EN ISO 1461:2009
Optional Finishes:	Powder-coating to support leg and frame
Handle Options:	Plascoated to any standard RAL colour
Configuration:	Single Sided
Bike Capacity:	Bespoke to customer specification
No. of Locking points:	3 per space - front wheel, rear wheel and locking loop
Fixing Options:	Surface Mounted
Optional Extras:	Location identifiers, anti-tamper fixings, signage
BREEAM:	Our products will assist with achieving BREEAM rating
Product Warranty:	Two years
Minimum Height:	2400mm
Recommended Height:	2600mm
Benefits:	Gas assisted top-tier mechanism to help lift heavier bikes.

PRODUCT NAME:
Double-Sided DoubleDek Plus 500 (Gas Assisted)

SCALE: 1:40	SHEET SIZE: A3	DRAWN BY: AG
CHECKED BY: JB	DATE: 02/05/2025	
PRODUCT NO. :	DDPL500-DS	

- All dimensions are in mm unless otherwise stated
- Any dimensions scaled from this drawing are taken at the reader's own risk