


DoubleDek Classic 375

Top View




*Plan view CAD block is extendable and can be used for space planning


Perspective View

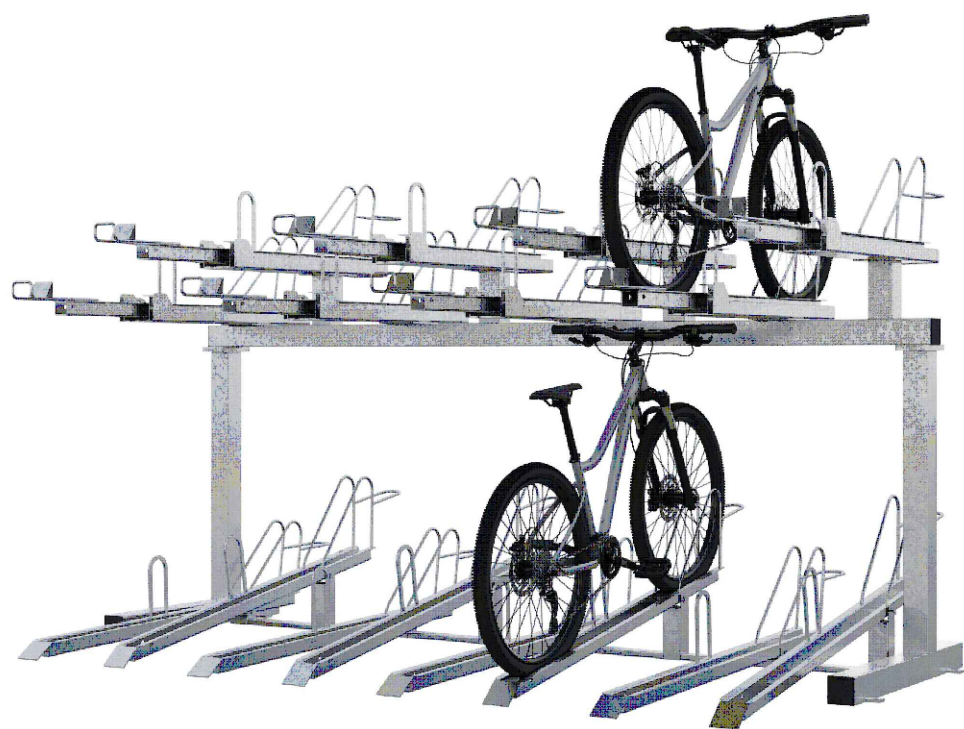

Front View

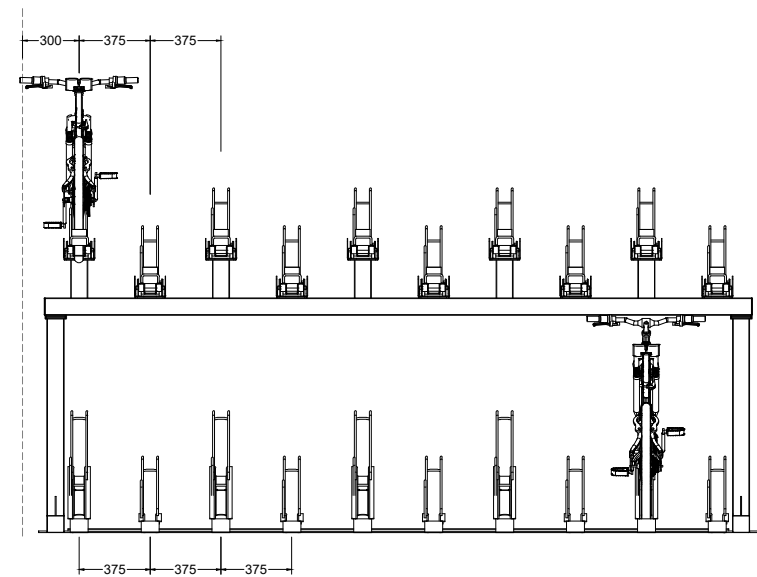


Right Side View

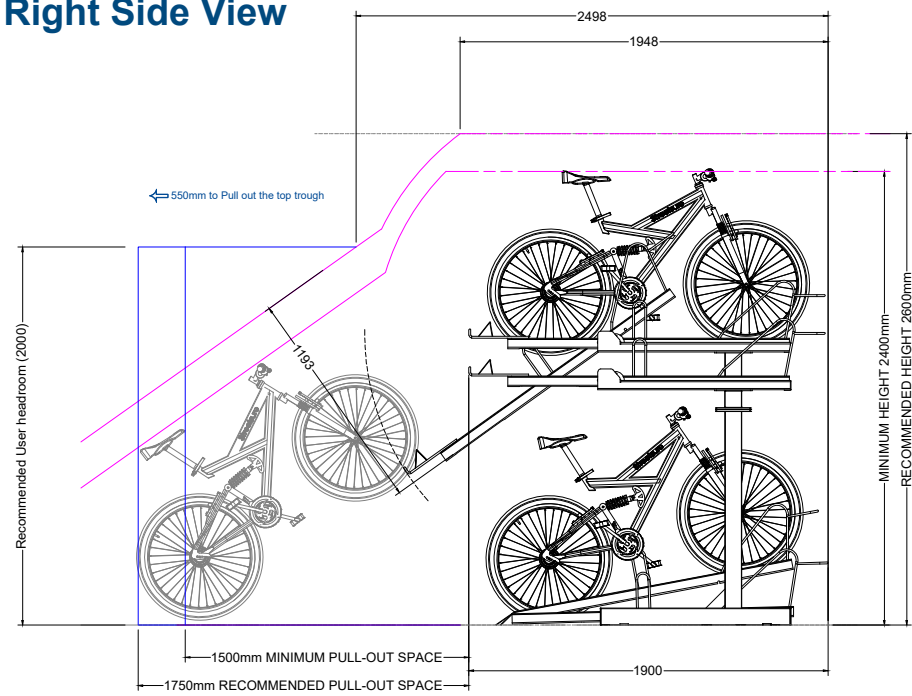

Technical information

Materials:	Mild Steel
Standard Finish:	Galvanised to BS EN ISO 1461:2009
Optional Finishes:	Powder-coating to support leg and frame
Handle Options:	Powder coated in various colours
Configuration:	Single Sided
Bike Capacity:	Bespoke to customer specification
No. of Locking points:	3 per space - front wheel, rear wheel and locking loop
Fixing Options:	Surface Mounted
Optional Extras:	Location identifiers, anti-tamper fixings, signage Sold Secure Bronze SS104:2020 Security Rated
BREEAM:	Our products will assist with achieving BREEAM rating
Product Warranty:	Two years
Minimum Height:	2400mm
Recommended Height:	2600mm

Drawing Icon:



Double Dek Classic
*Mild Steel
*Single Sided
*375mm Centres
*Galvanised
*Surface Mounted
*3No. Locking Points
(Back Wheel & Frame Locking Loop and Front Wheel)
*Min Height Required: 2,400mm
*Recommended Clear Height: 2,600mm

PRODUCT NAME:

DoubleDek Classic 375

SCALE: 1:40	SHEET SIZE: A3	DRAWN BY: AG
CHECKED BY: JB	DATE: 30/07/2026	
PRODUCT NO. :	DDCL375	

- All dimensions are in mm unless otherwise stated
- Any dimensions scaled from this drawing are taken at the reader's own risk



Bellsure

01730 719 292
info@bellsure.co.uk
bellsure.co.uk